


## Cylindrical Series (Male-Female Combination) Insulators

**Cylindrical Series (Male-Female Combination) Standoff insulators available in both Metric & UNC Threads & in variety of heights & inserts, Male-Female & Male-Male Inserts combination.**

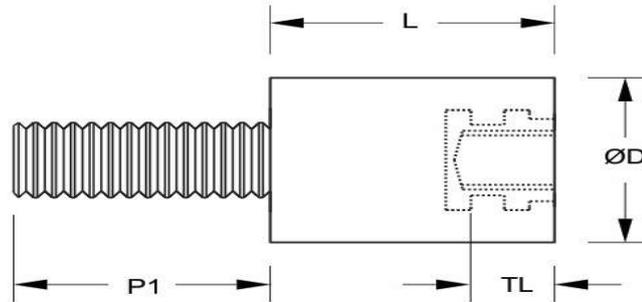

**Our Insulators are moulded from a flame retardant and track resistance glass reinforced Thermoset Polyester compound recognized to use for current carrying devices under UL Material Recognition No. E249670 & products are itself certified under UL Product Recognition no. E314972.**

- **Glow Wire Test - 960 °C**
- **Self-Extinguishing, UL 94 Vo Rated**
- **Non-Hygroscopic Material**
- **Halogen Free**
- **Operating Temperature range from (-) 40°C to 130°C.**

Part No	Dimension				Nominal Voltage (AC/DC)
	Ø D	L	P1	TL	
CY14.17-M5.10-F5.07	14	17	M5X10	M5X7	600/800
CY14.17-M6.15-F6.07	14	17	M6X15	M6X7	600/800
CY14.26-M4.10-F4.07	14	26	M4X10	M4X7	1000/1400

- All Dimensions are in mm only.
- Tolerance is applicable as per DIN Standard 2768.

-----**Global Commitment**

