


L Type Busbar Supports

L type Busbar Support offers versatile solution for holding of different busbars width & thickness. It acts as a cantilever support & can use as spacer in between two busbars. It also offers flexibility in fixing of busbars at desired location.

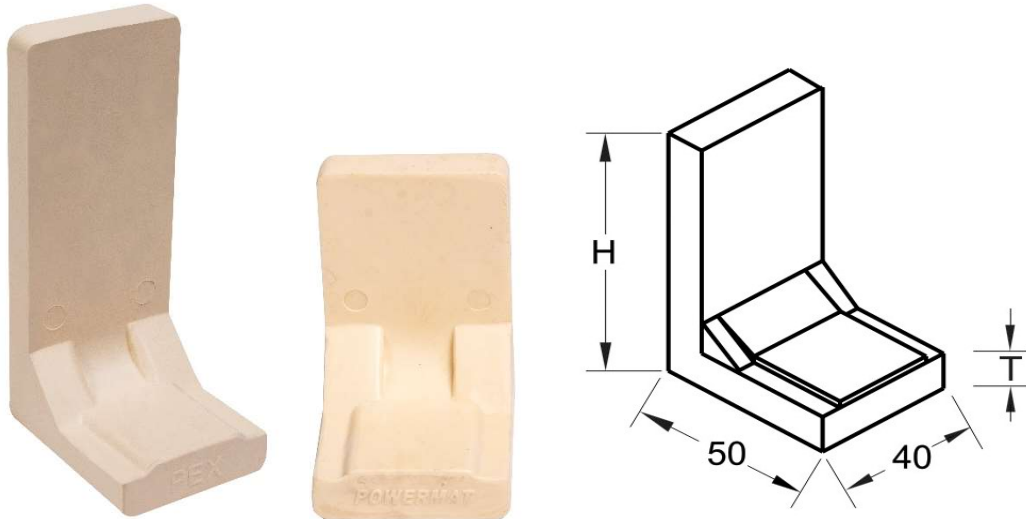

Our Busbar Supports are moulded from a flame retardant and track resistance glass reinforced Thermoset Polyester compound recognized to use for current carrying devices under UL Material Recognition No. E249670.

- Glow Wire Test - 960 °C
- Self-Extinguishing, UL 94 Vo Rated
- Non-Hygroscopic Material
- Halogen Free
- Operating Temperature range from (-) 40°C to 130°C.
-

POWERMAT code	Height H (mm)	Thickness (T) mm
L 60	60	10
L 85	85	10
L 100	100	10
L 125	125	10
L 150	150	12

- All Dimensions are in mm only.
- Tolerance is applicable as per DIN Standard 2768.

-----**Global Commitment**

www.powermatindia.com



Mail us : powermat@powermatindia.com