
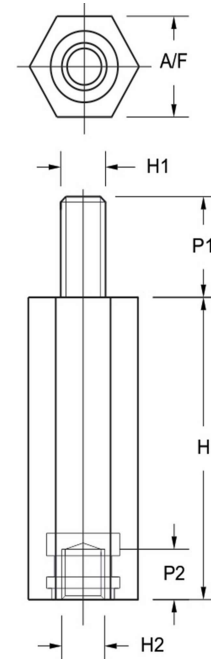


## PCB Spacers (Thread-M5 & AF-13.0 mm)

Full Hex PCB Spacer standoff insulators available in Metric threads, in variety of heights & inserts, in Male-Female combination.

- Self-Extinguishing, UL 94 V0 Rated
- Operating Temperature range from (-) 40°C to 130°C.

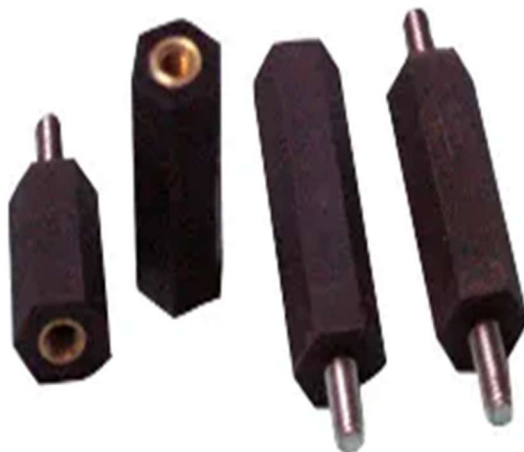

| Cat No.  | Dimension (mm) |    |    |    |     |    |    |
|----------|----------------|----|----|----|-----|----|----|
|          | L              | H1 | P1 | H2 | P2  | TL | SW |
| 5S15-13  | 15             | M5 | 7  | M5 | 8.5 | 7  | 13 |
| 5S20-13  | 20             | M5 | 7  | M5 | 8.5 | 7  | 13 |
| 5S25-13  | 25             | M5 | 7  | M5 | 8.5 | 7  | 13 |
| 5S30-13  | 30             | M5 | 7  | M5 | 8.5 | 7  | 13 |
| 5S45-13  | 45             | M5 | 7  | M5 | 8.5 | 7  | 13 |
| 5S55-13  | 55             | M5 | 7  | M5 | 8.5 | 7  | 13 |
| 5S70-13  | 70             | M5 | 7  | M5 | 8.5 | 7  | 13 |
| 5S85-13  | 85             | M5 | 7  | M5 | 8.5 | 7  | 13 |
| 5S120-13 | 120            | M5 | 7  | M5 | 8.5 | 7  | 13 |

- All Dimensions are in mm only.
- Tolerance is applicable as per DIN Standard 2768.

-----**Global Commitment**

[www.powermatindia.com](http://www.powermatindia.com)



Mail us : [powermat@powermatindia.com](mailto:powermat@powermatindia.com)