


Polyamide T Type Busbar Supports

Polyamide T type Busbar Support offers versatile solution for holding of different busbars width & thickness. It acts as a cantilever support & can use as spacer in between two busbars. It also offers flexibility in fixing of busbars at desired location.

- Glow Wire Test - 960 °C (FR grade)
- Self-Extinguishing, UL 94 V0 Rated
- Non-Hygroscopic Material
- Halogen Free
- Operating Temperature range from (-) 40°C to 130°C

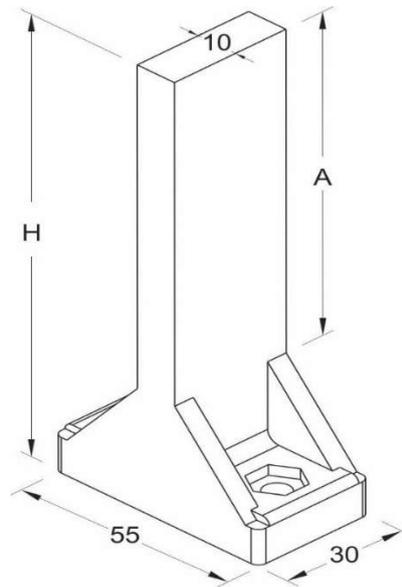

Dimensions		
POWERMAT Code	H mm	A mm
PAT – 85	85	52
PAT - 125	125	94

- All Dimensions are in mm only.
- Tolerance is applicable as per DIN Standard 2768

-----**Global Commitment**

www.powermatindia.com



Mail us : powermat@powermatindia.com