


WT Type Standoff Insulators

WT type standoff insulators available in both Metric & UNC Threads & in variety of heights & inserts, Male-Female & Male-Male Inserts combination.

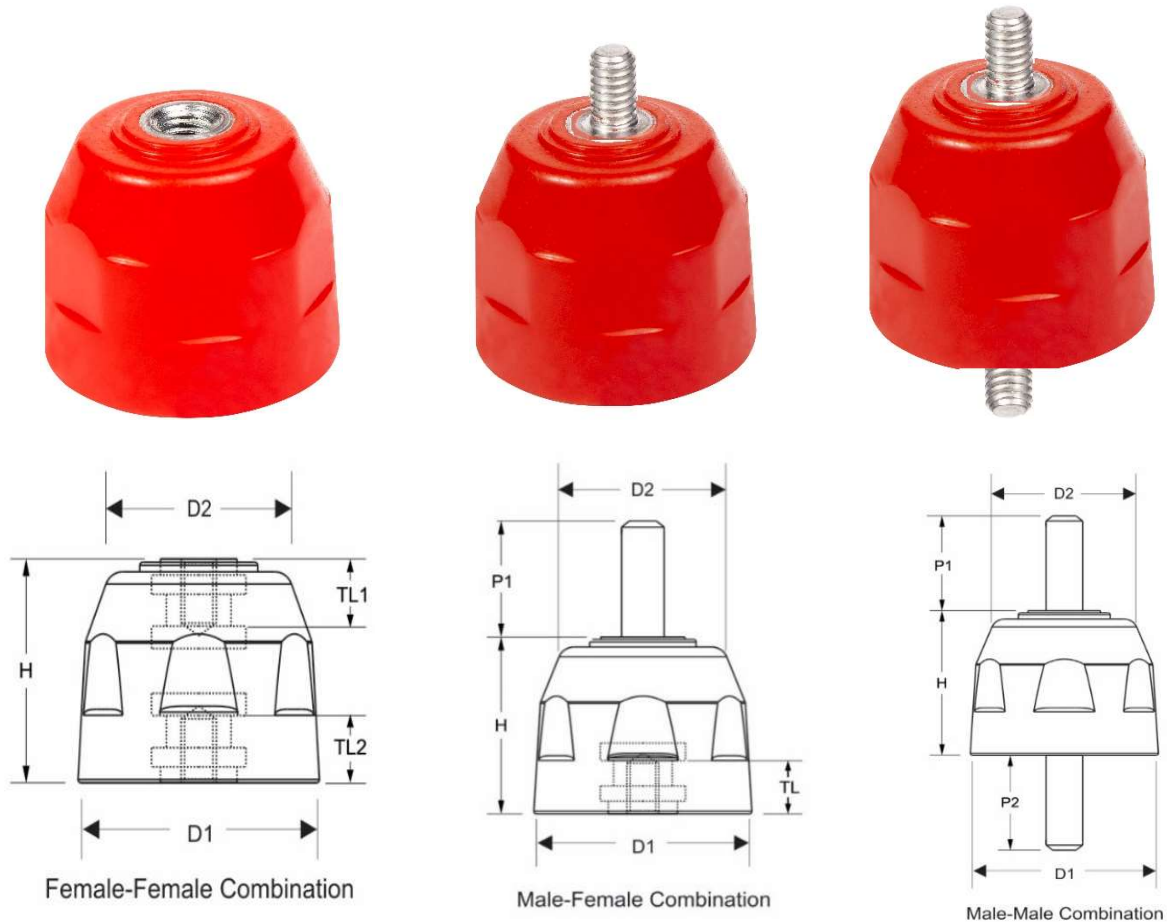

Our Insulators are moulded from a flame retardant and track resistance glass reinforced Thermoset Polyester compound recognized to use for current carrying devices under UL Material Recognition No. E249670 & products are itself certified under UL Product Recognition no. E314972.

- Glow Wire Test - 960 °C
- Self-Extinguishing, UL 94 Vo Rated
- Non-Hygroscopic Material
- Halogen Free
- Operating Temperature range from (-) 40°C to 130°C.

| WT Female-Female Series | | | | | |
|-------------------------|-----------------|-----------|-----------|----|----|
| Product Code | Dimensions (mm) | | | | |
| | H | TL1 | TL2 | D1 | D2 |
| | (mm) | | | | |
| WT0515 (M5) | 15 | M05 x 3.5 | M05 x 3.5 | 16 | 14 |
| WT0626 (M6) | 26 | M06 x 7.5 | M06 x 7 | 26 | 19 |
| WT0630 (M6) | 30 | M06 x 09 | M06 x 09 | 30 | 24 |
| WT0830 (M8) | 30 | M08 x 09 | M08 x 09 | 30 | 24 |

| | | | | | |
|--------------|----|----------|----------|----|----|
| WT0635 (M6) | 35 | M06 x 12 | M06 x 12 | 41 | 31 |
| WT0835 (M8) | 35 | M08 x 12 | M08 x 12 | 41 | 31 |
| WT1035 (M10) | 35 | M10 x 12 | M10 x 12 | 41 | 31 |
| WT0840 (M8) | 40 | M08 x 12 | M08 x 12 | 40 | 30 |
| WT1040 (M10) | 40 | M10 x 10 | M10 x 12 | 40 | 30 |
| WT1050 (M10) | 50 | M10 x 17 | M10 x 17 | 50 | 35 |

WT Male-Female Series

| Product Code | Dimensions | | | | |
|--------------------|------------|----------|-----------|----|----|
| | H | P1 | TL | D1 | D2 |
| | (mm) | | | | |
| WT0515-M0506.F0503 | 15 | M05 x 06 | M05 x 3.5 | 16 | 14 |
| WT0626-M0610.F0607 | 26 | M06 x 10 | M06 x 7.0 | 26 | 19 |
| WT0630-M0610.F0609 | 30 | M06 x 10 | M06 x 09 | 30 | 24 |
| WT0830-M0810.F0809 | 30 | M08 x 10 | M08 x 09 | 30 | 24 |
| WT0635-M0615.F0612 | 35 | M06 x 15 | M06 x 12 | 41 | 31 |
| WT0835-M0815.F0812 | 35 | M08 x 15 | M08 x 12 | 41 | 31 |
| WT1035-M1015.F1012 | 35 | M10 x 15 | M10 x 12 | 41 | 31 |
| WT0840-M0815.F0812 | 40 | M08 x 15 | M08 x 12 | 40 | 30 |
| WT1040-M1015.F1012 | 40 | M10 x 15 | M10 x 12 | 40 | 30 |
| WT1050-M1020.F1017 | 50 | M10 x 20 | M10 x 17 | 50 | 35 |

WT Male-Male Series

| Product Code | Dimensions | | | | |
|--------------------|------------|----------|----------|----|----|
| | H | P1 | P2 | D1 | D2 |
| | (mm) | | | | |
| WT0515-M0506.M0506 | 15 | M05 x 06 | M05 x 06 | 16 | 14 |
| WT0626-M0610.M0610 | 26 | M06 x 10 | M06 x 10 | 26 | 19 |
| WT0630-M0610.M0610 | 30 | M06 x 10 | M06 x 10 | 30 | 24 |
| WT0830-M0810.M0810 | 30 | M08 x 10 | M08 x 10 | 30 | 24 |
| WT0635-M0615.M0615 | 35 | M06 x 15 | M06 x 15 | 41 | 31 |
| WT0835-M0815.M0815 | 35 | M08 x 15 | M08 x 15 | 41 | 31 |
| WT1035-M1015.M1015 | 35 | M10 x 15 | M10 x 15 | 41 | 31 |
| WT0840-M0815.M0815 | 40 | M08 x 15 | M08 x 15 | 40 | 30 |
| WT1040-M1015.M1015 | 40 | M10 x 15 | M10 x 15 | 40 | 30 |
| WT1050-M1015.M1015 | 40 | M10 x 15 | M10 x 15 | 50 | 35 |

- All Dimensions are in mm only.
- Tolerance is applicable as per DIN Standard 2768.

-----Global Commitment

www.powermatindia.com



Mail us : powermat@powermatindia.com